


ETANJ LED AYDINLATMA CEILING LED LIGHTING



Gövde Body	PC Enjeksiyon PC Injection
Led Model Led	SMD Mid/High Power LED SMD Mid/High Power
Optik Kapak Optical Cover	Yüksek Geçirgenlikli PC PC with High Light Transmission
Sürücü Model Drive Model	Yüksek Verimlilikte Sabit Akımlı Sürücü High Efficiency Constant Current Driver
Opsiyonlar Options	Dimleme DALI 1-10V Acil Aydınlatma 1 Saatlik Kit 1 Hour Kit 3 Saatlik Kit 3 Hours Kit Sensör PIR Koridor Fonksiyonu Corridor Function

Teknik Çizim ► Technical Drawing

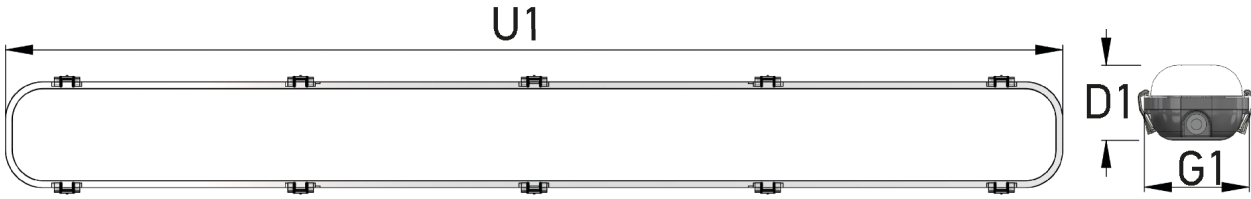

Teknik Çizim Tablo ► Technical Drawing Table

Ürün Kodu Product Code	U (mm)	G (mm)	D (mm)
SV-ETN-PC L60	676	94	95
SV-ETN-PC L120	1283	94	95
SV-ETN-PC L120 / 60	1283	146	95
SV-ETN-PC 150	1583	94	95

Ambalaj Bilgileri ► Packaging Information

Ürün Kodu Product Code	Paket Ölçüsü Package Quantity	Paket Hacmi Package Volume	Paket Ağırlığı Package Weight
SV-ETN-PC L60	710x110x110	0,0085 m³	1,5 kg
SV-ETN-PC L120	1330x110x110	0,0160 m³	2,5 kg
SV-ETN-PC L120-60	1330x160x110	0,0234 m³	3 kg
SV-ETN-PC 150	1630x110x110	0,0204 m³	3 kg

- Klasik aydınlatma armatürlerine oranla % 80'e kadar enerji tasarrufu
- Cıva içermeyen geri dönüşümlü doğa dostu ürün
- Yüksek kaliteli güvenli izole LED sürücü
- Yüksek kaliteli LED malzeme
- Uzun ömürlü, bakım masrafsız kullanım

- Energy savings up to 80% compared to conventional lighting fixtures
- Mercury-free, recyclable, environmentally friendly products
- High-quality security isolated LED drivers
- High-quality LED material
- Long life, maintenance free of charge to use

Teknik Özellikler ► Specifications

Ürün Kodu Product Code	Güç Tüketim Rated Power	Giriş Voltajı Input Voltage	Renk Sıcaklığı Color Temperature	Lümen Değeri Luminous Flux	Etkinlik Faktörü Efficiency Factor	CRI CRI	IŞIK AÇISI Light Angle	IP Sınıfı IP Class
SV-ETN-PC L60 20W	20W	AC220~240V	3000K/4000K/5000K/6500K	2.100 lm	105 lm/W	≥80	120°	IP65
SV-ETN-PC L120 20W	20W	AC220~240V	3000K/4000K/5000K/6500K	2.100 lm	105 lm/W	≥80	120°	IP65
SV-ETN-PC L120 30W	30W	AC220~240V	3000K/4000K/5000K/6500K	3.150 lm	105 lm/W	≥80	120°	IP65
SV-ETN-PC L120 40W	40W	AC220~240V	3000K/4000K/5000K/6500K	4.420 lm	105 lm/W	≥80	120°	IP65
SV-ETN-PC L120 47W	47W	AC220~240V	3000K/4000K/5000K/6500K	4.900 lm	105 lm/W	≥80	120°	IP65
SV-ETN-PC L120 60W	60W	AC220~240V	3000K/4000K/5000K/6500K	6.300 lm	105 lm/W	≥80	120°	IP65
SV-ETN-PC L150 60W	60W	AC220~240V	3000K/4000K/5000K/6500K	6.300 lm	105 lm/W	≥80	120°	IP65

